

PHILIPS


Product Overview

XI025C100V036DNM1M

Brand Name	XITANIUM
Description	XITANIUM 25W 0.3-1.0A 36V 0-10V
Input Voltage	120 ~ 277V
Input Freq.	50/60Hz
RoHS	Yes
Status	Preliminary

Input Voltage (Vac)	Output Power (W)	Output Voltage Range (V)	Output Current (A)	Efficiency@ Max Load and 70°C Case	Max Case Temp. (°C)	Input Current (Arms)	Max. Input Power (W)	Inrush Current (Apk/50%-µs)	THD @ Max Load (%)	Power Factor @ Max Load	Surge Protection Common/Diff (KV)	Weight (Lbs/kgs)	Envir. Protection Rating
120	25	18 - 36	0.3 - 1.0	84	Life - 80°C UL - 90°C	0.27	30	29.3 / 96	<10%	>0.95	2/2	0.41 / 0.19	UL damp and dry
277				86		0.12		47.1 / 93	<15%				

Wire Diagram

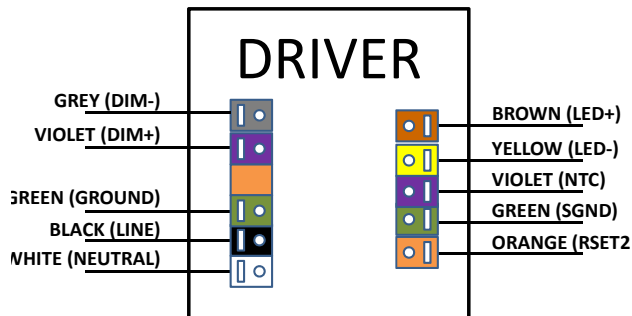

Product Data:

Install in accordance with National and Local Electrical Codes.

Use 18AWG Solid Copper Wire, Rated $\geq 300V/90C$.
Strip wire to 3/8".

For Fortimo systems connect pink wire to Violet(NTC)

Dimming	Dimming Range	Minimum Output Current (A)	Other Comments
0-10V Analog Class 2 Wiring	5% ~ 100%	0.015	Dimming source current: 150 μA

Enclosure



	in.	mm
Case Length	4.20	106.7
Case Width	2.36	60
Case Height	0.95	24
Mounting Length	4.60	116.8
Overall Length	4.96	126



Revised 7/17/2013

PHILIPS LIGHTING ELECTRONICS N.A.

10275 WEST HIGGINS ROAD · ROSEMONT, IL 60018

Tel: 800-322-2086 · Fax: 888-423-1882 · www.philips.com/advance

Customer Support/Technical Service: 800-372-3331 · OEM Support: 866-915-5886



Electrical Specifications

All the specifications are typical and at 25°C Tcase unless specified otherwise.

XI025C100V036DNM1M

Brand Name	XITANIUM
Description	XITANIUM 25W 0.3-1.0A 36V 0-10V
Input Voltage	120 ~ 277V
Input Freq.	50/60Hz
RoHS	Yes
Status	Preliminary

Order code	XI025C100V036DNM1M
Full product code	XI025C100V036DNM1M
Full product name	Xitanium 25W 0.3-1.0A 36V 0-10V
Line Voltage	120-277Vac_rms
Line Current	0.27A @ 120V, 0.12A @ 277V
Line Frequency	50/60Hz
Min. Mains voltage operational	108 V [min]
Max. Mains voltage operational	305V [max]
THD (total)	Refer to graph
Power Factor (PF)	Refer to graph
Inrush Current	Per NEMA 410
Lightning Surge Protection	Refer to table below
Output voltage range	18V to 36Vdc
Maximum open circuit voltage	42V
Output Current Ripple (ripple = peak to peak / average)	30% max @ max Iout Low frequency (≤ 120 Hz) content $< 5\%$
Protections	Short Circuit and Open Circuit Protection for LED + and LED-
Ambient Temp Range	-20C to +50C
Max Case Temperature (Tcase)	80°C for Life & 90°C for UL Safety
Interfaces	0-10V Dimming, AOC, MTP
AOC (Adjustable Output Current)	300mA to 1000mA via external resistor (refer to graph below & notes in the Application section)
MTP (Module Temperature Protection)	Current cutback to 10% (Refer to specifications below)
0-10V Dimming Specifications	150 μ A source current from driver, See dim curve for detail.
Environmental Protection Rating	UL damp and dry
Agency Approbations	UL8750, UL1310, UL935, CSA-C22.2 No. 250.13-12, CSA C22.2 No. 223
Electromagnetic Compliance	FCC Title 47 Part 15 Class A
Isolation	Refer to table
Audible noise	< 24 dB Class A

Revised 7/17/2013

PHILIPS LIGHTING ELECTRONICS N.A.

10275 WEST HIGGINS ROAD · ROSEMONT, IL 60018

Tel: 800-322-2086 · Fax: 888-423-1882 · www.philips.com/advance

Customer Support/Technical Service: 800-372-3331 · OEM Support: 866-915-5886



Electrical Specifications

All the specifications are typical and at 25°C Tcase unless specified otherwise.

XI025C100V036DNM1M	
Brand Name	XITANIUM
Description	XITANIUM 25W 0.3-1.0A 36V 0-10V
Input Voltage	120 ~ 277V
Input Freq.	50/60Hz
RoHS	Yes
Status	Preliminary


0-10V Dimming Curve:

Dimming source current from the driver: 150 μ A (@ 0<Vdim<8V)

LED Current Tolerance at 1000mA $\leq$ 5% over temperature and component variations and $\leq$ 10% at any dim level.

Minimum Dim Level: 5% of Iout (minimum 15mA)

Maximum output voltage on the dimming wires: 13V

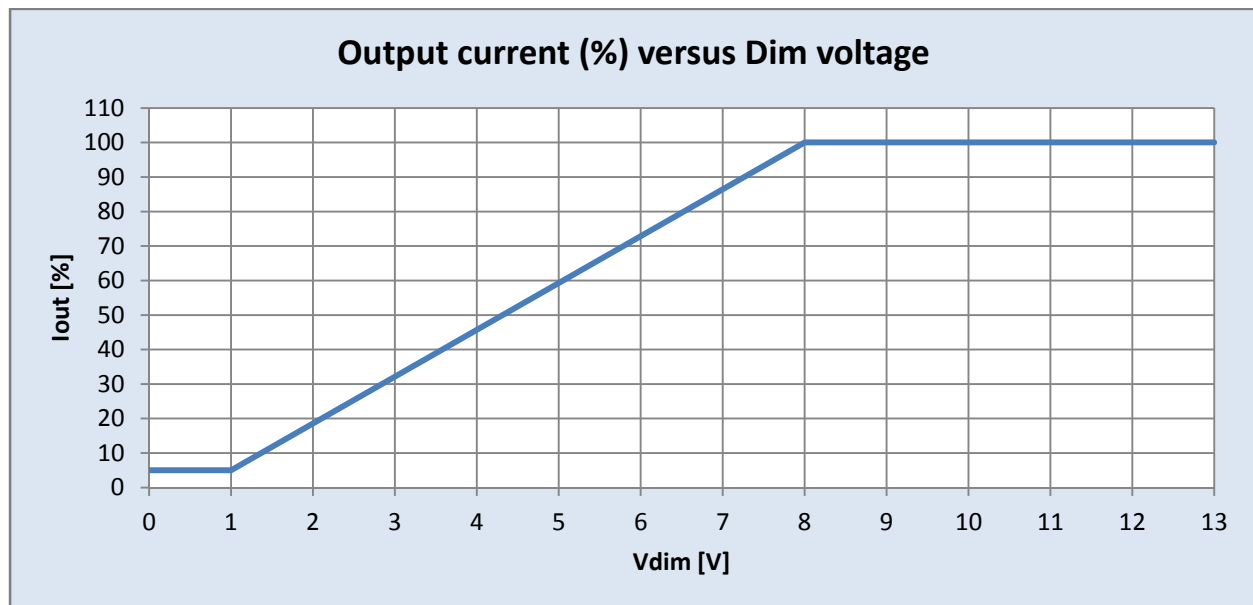

Approved Dimmer List

Manufacturer	Manufacturer Part Number
T.B.D	T.B.D

Revised 7/17/2013

PHILIPS LIGHTING ELECTRONICS N.A.

10275 WEST HIGGINS ROAD · ROSEMONT, IL 60018

Tel: 800-322-2086 · Fax: 888-423-1882 · www.philips.com/advance

Customer Support/Technical Service: 800-372-3331 · OEM Support: 866-915-5886



Electrical Specifications


All the specifications are typical and at 25°C Tcase unless specified otherwise.

XI025C100V036DNM1M	
Brand Name	XITANIUM
Description	XITANIUM 25W 0.3-1.0A 36V 0-10V
Input Voltage	120 ~ 277V
Input Freq.	50/60Hz
RoHS	Yes
Status	Preliminary

AOC (Adjustable Output Current) Settings:

LED Current Tolerance over temperature and component variations for AOC $\leq$ 10% at any level.

Rset(Ohms)	Current (mA)
100	100
120	111
150	124.5
180	138.2
220	154.6
270	176.4
330	203.7
390	228.3
470	261.0
560	296.5
680	340.2
820	392.1
1000	452.1
1200	514.9
1500	602.3
1800	684.2
2200	779.7
2700	883.5
3300	992.7
3900	1000

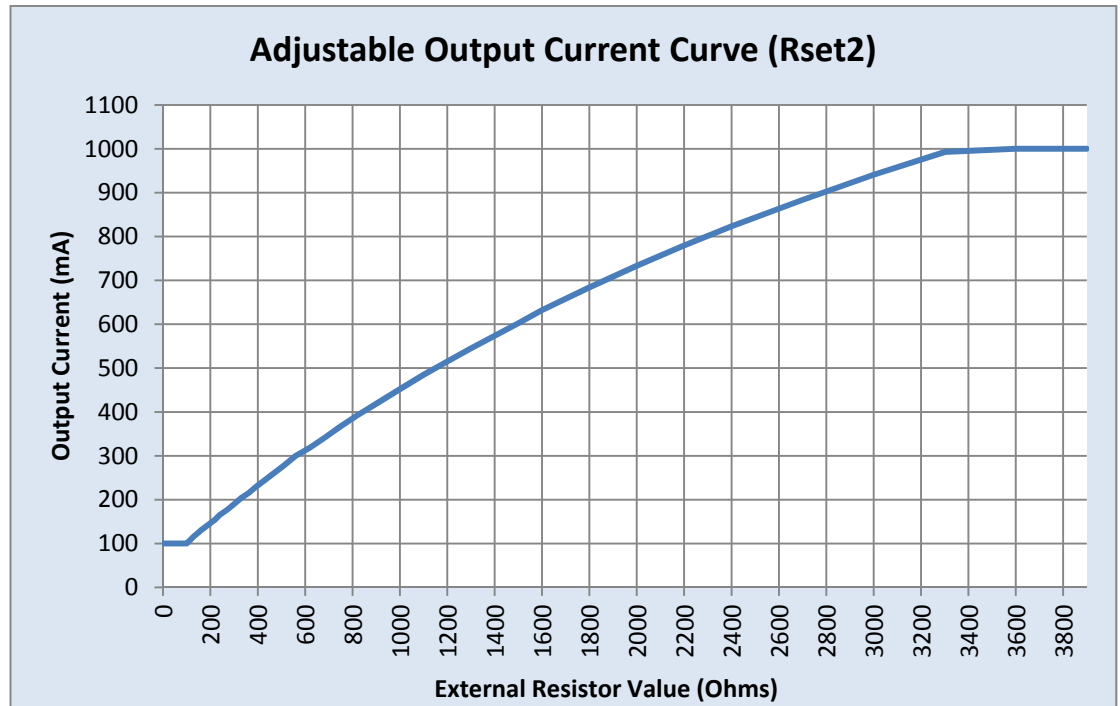

Driver will default to 700mA when Rset is left open.

Revised 7/17/2013

PHILIPS LIGHTING ELECTRONICS N.A.

10275 WEST HIGGINS ROAD · ROSEMONT, IL 60018

Tel: 800-322-2086 · Fax: 888-423-1882 · www.philips.com/advance

Customer Support/Technical Service: 800-372-3331 · OEM Support: 866-915-5886




Electrical Specifications

All the specifications are typical and at 25°C Tcase unless specified otherwise.

XI025C100V036DNM1M

Brand Name	XITANIUM
Description	XITANIUM 25W 0.3-1.0A 36V 0-10V
Input Voltage	120 ~ 277V
Input Freq.	50/60Hz
RoHS	Yes
Status	Preliminary

Operating Window:

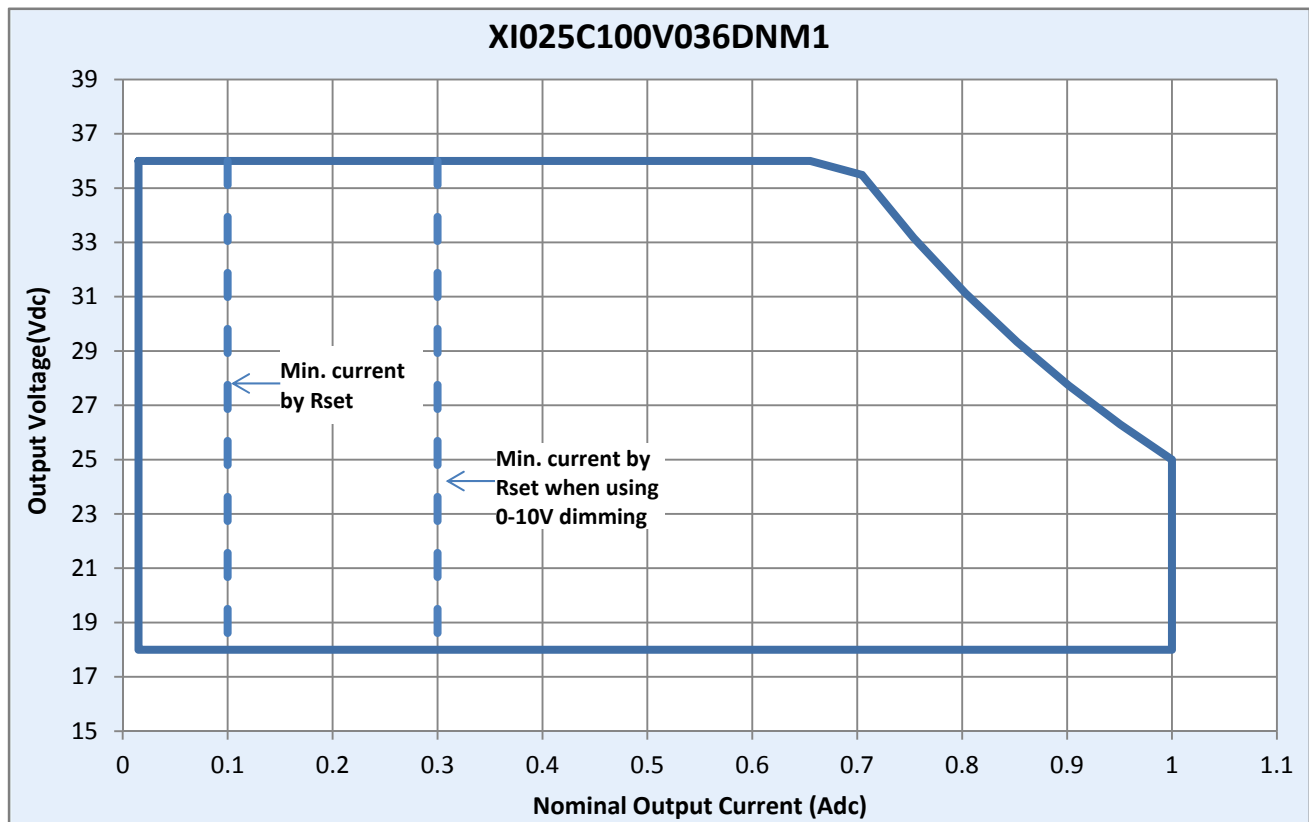

Revised 7/17/2013

PHILIPS LIGHTING ELECTRONICS N.A.

10275 WEST HIGGINS ROAD · ROSEMONT, IL 60018

Tel: 800-322-2086 · Fax: 888-423-1882 · www.philips.com/advance

Customer Support/Technical Service: 800-372-3331 · OEM Support: 866-915-5886




Electrical Specifications

All the specifications are typical and at 25°C Tcase unless specified otherwise.


XI025C100V036DNM1M

Brand Name	XITANIUM
Description	XITANIUM 25W 0.3-1.0A 36V 0-10V
Input Voltage	120 ~ 277V
Input Freq.	50/60Hz
RoHS	Yes
Status	Preliminary

Module Temperature Protection:

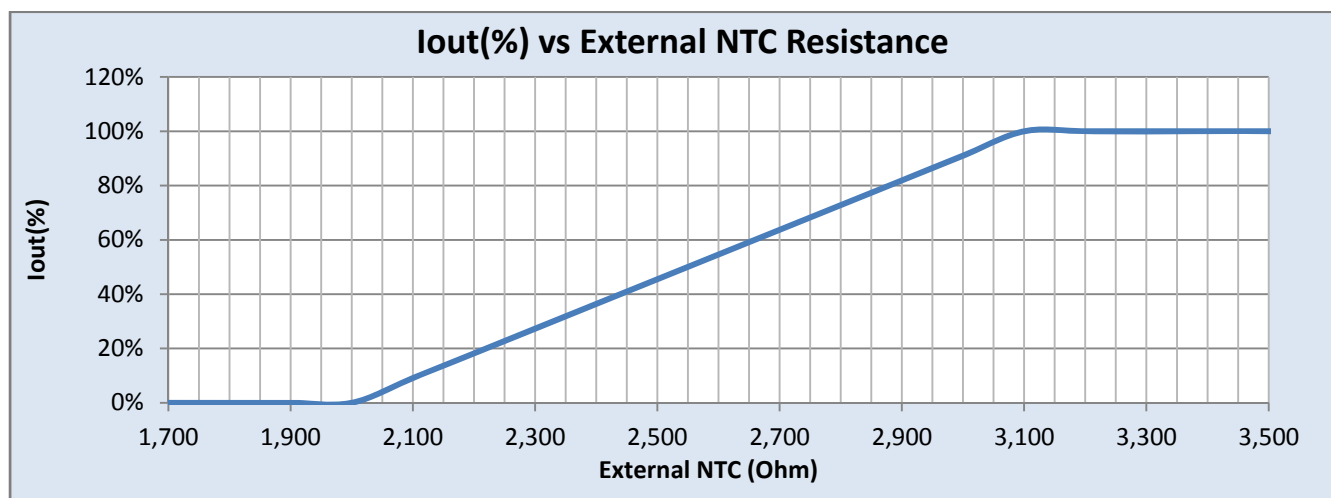

For example: Using NTC Vishay 15kOhm $\pm$ 2% NTC, B25/85=3700 (238I 615 54I53), the output current Vs module temperature behavior is as follows.

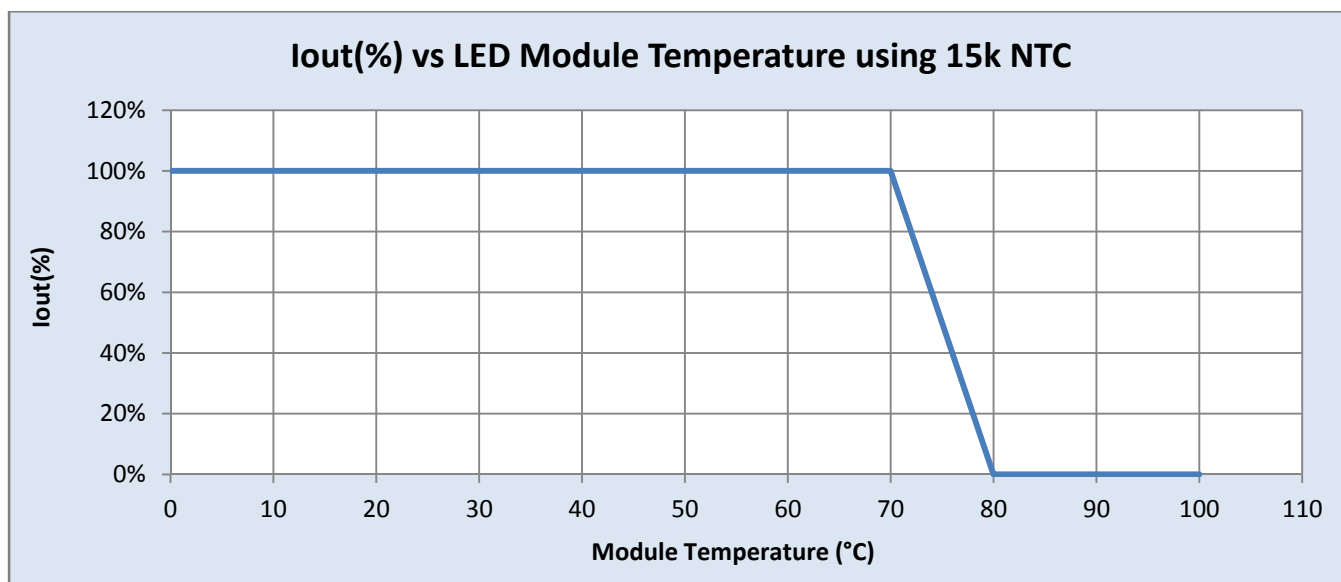

Revised 7/17/2013

PHILIPS LIGHTING ELECTRONICS N.A.

10275 WEST HIGGINS ROAD · ROSEMONT, IL 60018

Tel: 800-322-2086 · Fax: 888-423-1882 · www.philips.com/advance

Customer Support/Technical Service: 800-372-3331 · OEM Support: 866-915-5886




Electrical Specifications


All the specifications are typical and at 25°C Tcase unless specified otherwise.

XI025C100V036DNM1M	
Brand Name	XITANIUM
Description	XITANIUM 25W 0.3-1.0A 36V 0-10V
Input Voltage	120 ~ 277V
Input Freq.	50/60Hz
RoHS	Yes
Status	Preliminary

Iout vs. Tcase of Driver:

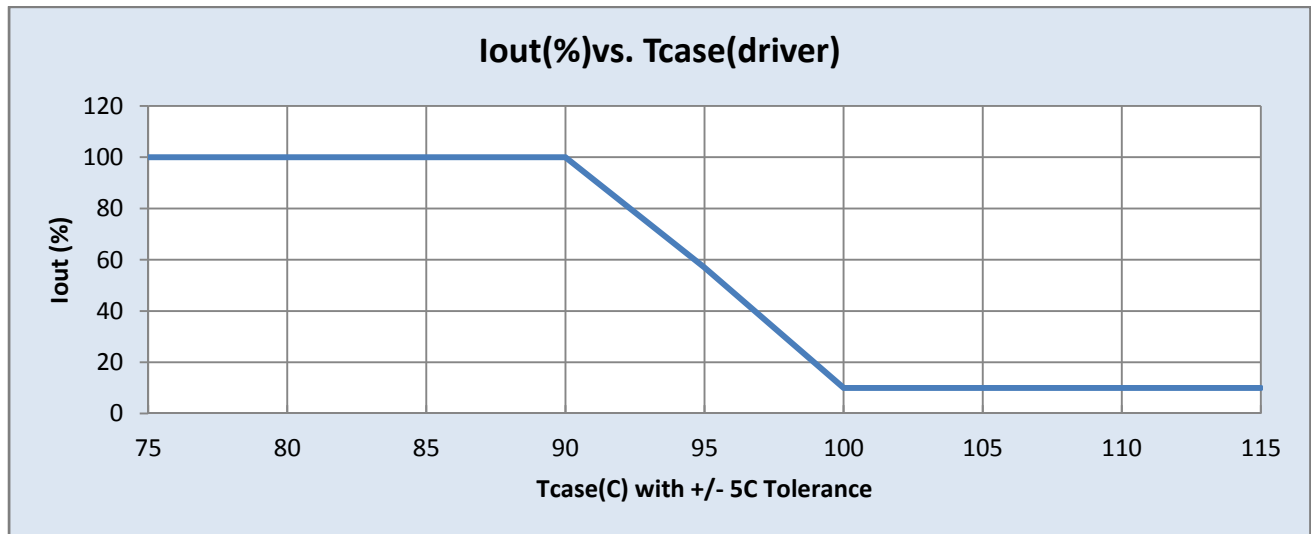

Lifetime vs. Tcase of Driver:

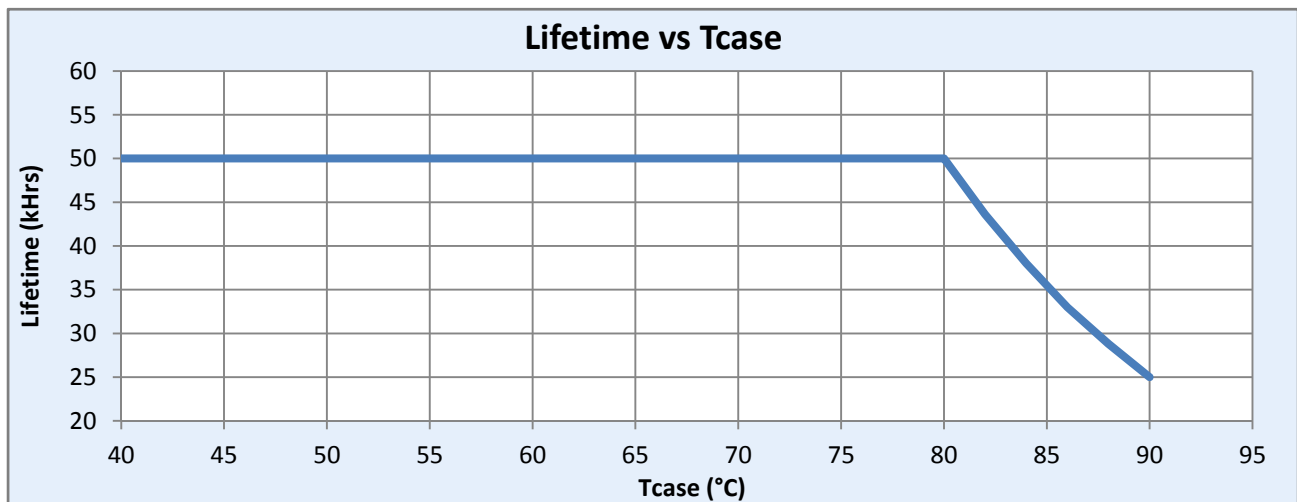

Revised 7/17/2013

PHILIPS LIGHTING ELECTRONICS N.A.
10275 WEST HIGGINS ROAD · ROSEMONT, IL 60018
Tel: 800-322-2086 · Fax: 888-423-1882 · www.philips.com/advance
Customer Support/Technical Service: 800-372-3331 · OEM Support: 866-915-5886

PHILIPS

Electrical Specifications

All the specifications are typical and at 25°C Tcase unless specified otherwise.


XI025C100V036DNM1M

Brand Name	XITANIUM
Description	XITANIUM 25W 0.3-1.0A 36V 0-10V
Input Voltage	120 ~ 277V
Input Freq.	50/60Hz
RoHS	Yes
Status	Preliminary

Failure Rate based upon field call rate data:

- <0.01% per 1 kHr @ ≤ Tcase 75 C

Inrush Current Info:

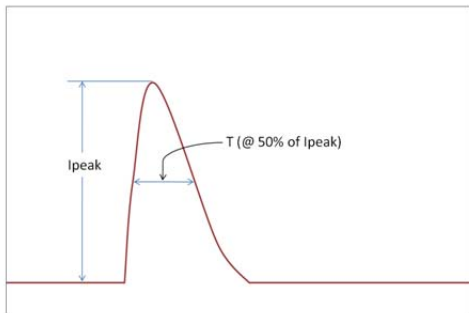

Vin	Ipeak	T (@ 50% of Ipeak)
120 Vrms	29.3 A	96 μs
277 Vrms	47.1A	93 μs

Inrush current is measured at peak of the corresponding line voltage, source impedance per NEMA 410.

Lightning Surge Info:

ANSI Surge Type	Differential Mode (L-N)	Common Mode (L-G, N-G, L&N-G)
100 kHz Ring Wave (w/t 30Ω)	6kV	4kV
1.2/50μs - 8/20μs Combination Wave (w/t 2Ω)	2kV	2kV

Revised 7/17/2013

PHILIPS LIGHTING ELECTRONICS N.A.

10275 WEST HIGGINS ROAD · ROSEMONT, IL 60018

Tel: 800-322-2086 · Fax: 888-423-1882 · www.philips.com/advance


Customer Support/Technical Service: 800-372-3331 · OEM Support: 866-915-5886



Mechanical Specifications

XI025C100V036DNM1M	
Brand Name	XITANIUM
Description	XITANIUM 25W 0.3-1.0A 36V 0-10V
Input Voltage	120 ~ 277V
Input Freq.	50/60Hz
RoHS	Yes
Status	Preliminary

Mechanical Drawing:

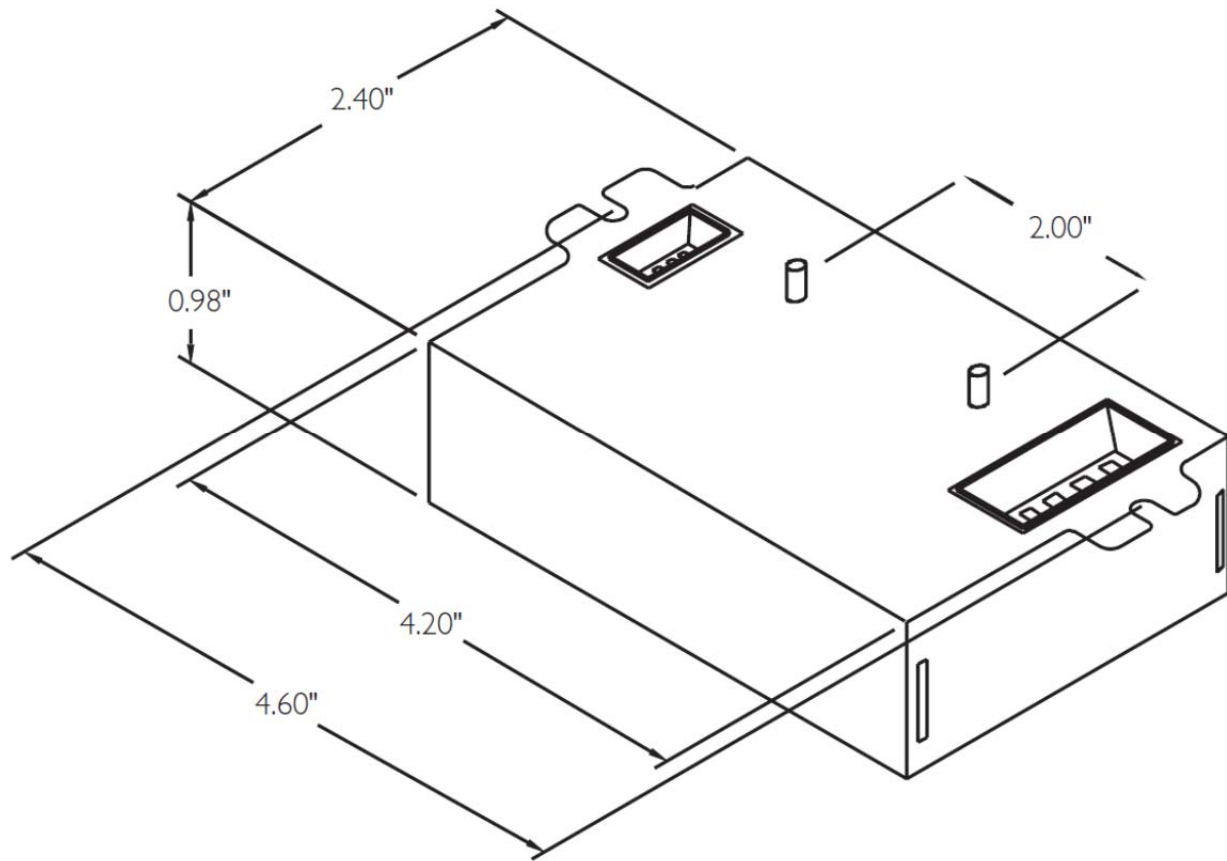

Revised 7/17/2013

PHILIPS LIGHTING ELECTRONICS N.A.

10275 WEST HIGGINS ROAD · ROSEMONT, IL 60018

Tel: 800-322-2086 · Fax: 888-423-1882 · www.philips.com/advance



Customer Support/Technical Service: 800-372-3331 · OEM Support: 866-915-5886



Performance Characteristics

Based on measurements on a typical sample. The accuracy of the measurements is within the tolerance of the measurement instruments. The graphs are meant to be a guideline and not a specification.

XI025C100V036DNM1M	
Brand Name	XITANIUM
Description	XITANIUM 25W 0.3-1.0A 36V 0-10V
Input Voltage	120 ~ 277V
Input Freq.	50/60Hz
RoHS	Yes
Status	Preliminary

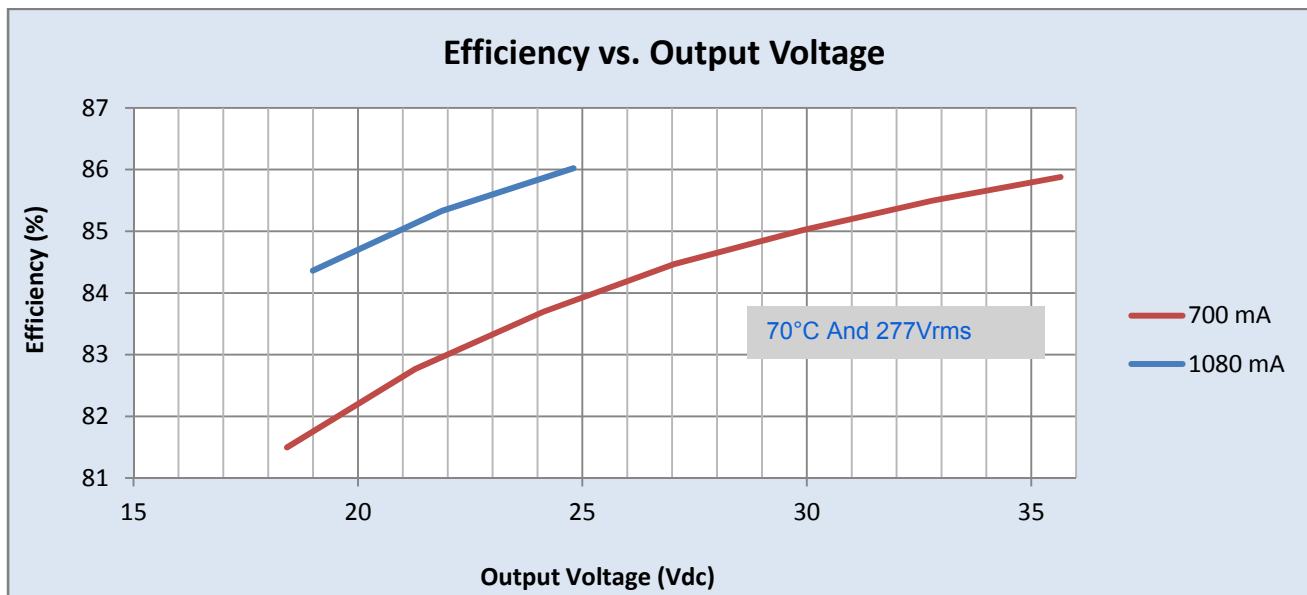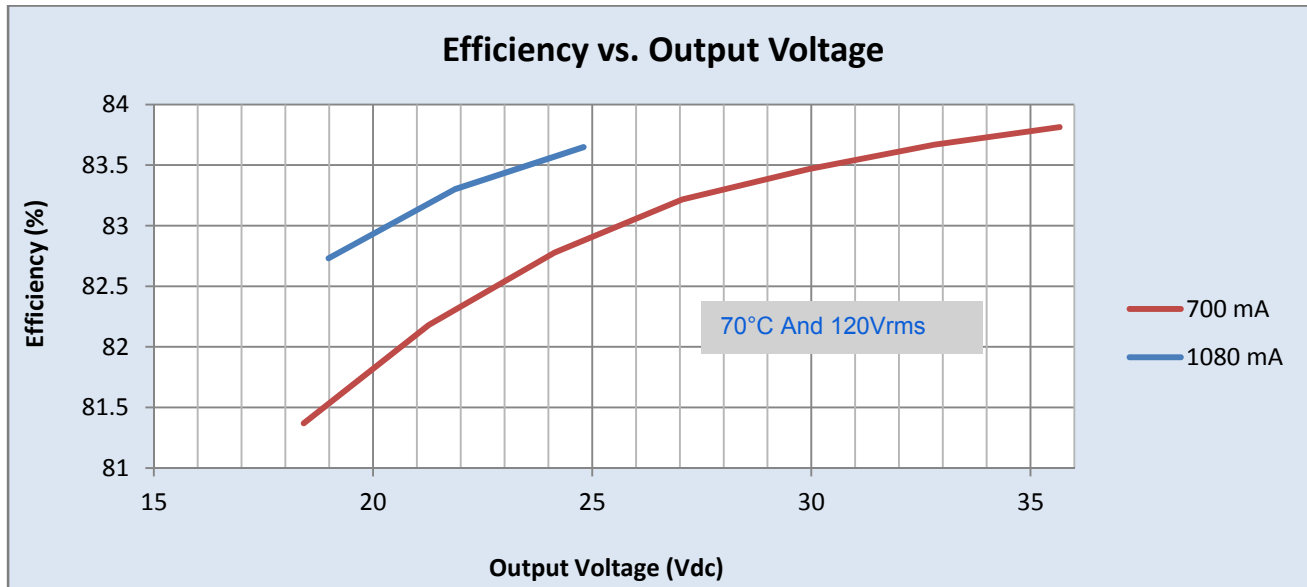

Revised 7/17/2013

PHILIPS LIGHTING ELECTRONICS N.A.
10275 WEST HIGGINS ROAD · ROSEMONT, IL 60018
Tel: 800-322-2086 · Fax: 888-423-1882 · www.philips.com/advance
Customer Support/Technical Service: 800-372-3331 · OEM Support: 866-915-5886




Performance Characteristics

Based on measurements on a typical sample. The accuracy of the measurements is within the tolerance of the measurement instruments. The graphs are meant to be a guideline and not a specification.


XI025C100V036DNM1M

Brand Name	XITANIUM
Description	XITANIUM 25W 0.3-1.0A 36V 0-10V
Input Voltage	120 ~ 277V
Input Freq.	50/60Hz
RoHS	Yes
Status	Preliminary

Power Factor vs. Output Power

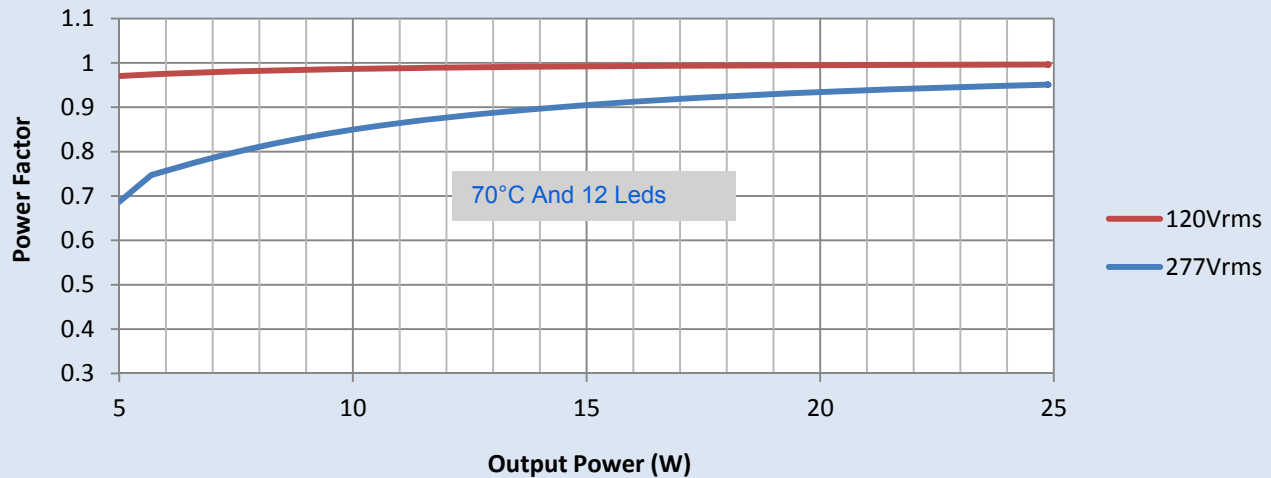

Total Harmonic Distortion vs. Output Power

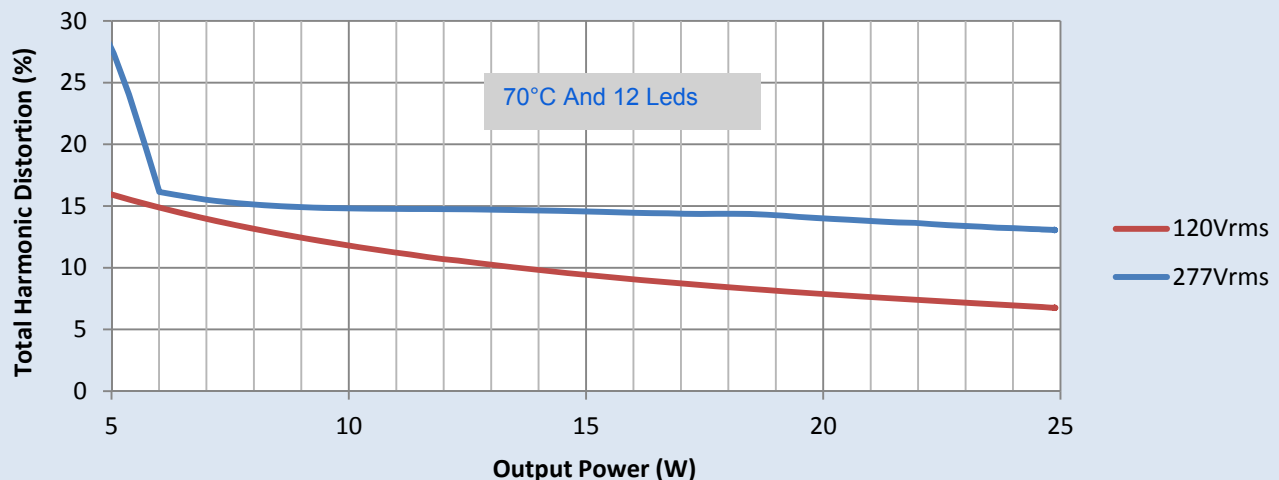

Revised 7/17/2013

PHILIPS LIGHTING ELECTRONICS N.A.

10275 WEST HIGGINS ROAD · ROSEMONT, IL 60018

Tel: 800-322-2086 · Fax: 888-423-1882 · www.philips.com/advance

Customer Support/Technical Service: 800-372-3331 · OEM Support: 866-915-5886



Application Notes:

XI025C100V036DNM1M	
Brand Name	XITANIUM
Description	XITANIUM 25W 0.3-1.0A 36V 0-10V
Input Voltage	120 ~ 277V
Input Freq.	50/60Hz
RoHS	Yes
Status	Preliminary

Isolation:

Isolation	Input	Output	0-10V (Class 2)	Enclosure
Input	Not applicable	2xU+1KV	2.5KVac	2xU+1KV
Output	2xU+1KV	Not applicable	Non-isolated	500V
0-10V (Class 2)	2.5KVac	Non-isolated	Not applicable	500V
Enclosure	2xU+1KV	500V	500V	Not applicable

UL Conditions of Acceptability:

Please contact your Philips representative for a copy of the latest UL Conditions Of Acceptability (COA).

Revised 7/17/2013

PHILIPS LIGHTING ELECTRONICS N.A.
10275 WEST HIGGINS ROAD · ROSEMONT, IL 60018
Tel: 800-322-2086 · Fax: 888-423-1882 · www.philips.com/advance
Customer Support/Technical Service: 800-372-3331 · OEM Support: 866-915-5886