

PHILIPS

Xitanium

LED driver



Datasheet

Xitanium LITE Prog LED Xtreme drivers

Xi LP 150W 0.3-1.0A SL 230V S240 sXt

Xitanium LITE Prog LED Xtreme drivers

Philips Xitanium Lite Programmable LED drivers are value engineered to deliver a carefully selected feature set and high-end performance, making it a preferred choice for many outdoor applications. The portfolio offers high flexibility with a customizable operating window, enabling differentiation in LED lighting designs via system tuning and being prepared for LED efficacy upgrades.

In this product family Philips introduces new drivers in a stretched form factor with a balanced feature set, which offer high value for both OEM customers and end-users. The products can replace the existing programmable outdoor LED drivers and will bring significant improvement in programming, assembly into a luminaire and electrical performance. One of the key features is SimpleSet®, an easy and fast way to configure the driver without the need to power the driver.

Benefits

- Ultimate robustness, offering peace of mind and lower maintenance costs
- Balanced configurable feature set covering the most common applications
- Easy to design-in and install for Class I and Class II applications
- Energy savings through high efficiency and via a choice of dimming options

Features

- SimpleSet®, wireless configuration interface
- High surge protection
- Long lifetime and robust protection against moisture, vibration and temperature
- Configurable operating windows(AOC)
- External control interface
- 1-step autonomous dimming via integrated DynaDimmer LITE
- Thermal protection for driver (integrated)
- Simplified linear version of Constant Light Output (CLO LITE)

Application

- Road and street lighting
- Area lighting

Electrical input data

| Specification item | Value | Unit | Condition |
|-----------------------------|---------------|------|------------------------------|
| Rated input voltage range | 220 ... 240 | Vac | Performance |
| Input voltage range | 198 ... 264 | Vac | Operational |
| Rated input frequency range | 50 ... 60 | Hz | Performance |
| Input frequency range | 45 ... 66 | Hz | Operational |
| Rated input current | 0.79 ... 0.65 | A | 230Vac, full load |
| Rated input power | 162 | W | 230Vac, full load |
| Power factor | ≥ 0.99 | | 230Vac, full load. See graph |
| Total harmonic distortion | ≤ 8 | % | 230Vac, full load. See graph |
| Efficiency | 93 | % | 230Vac, full load. See graph |

Electrical output data

| Specification item | Value | Unit | Condition |
|-----------------------------|------------------|------|--|
| Regulation method | Constant Current | | |
| Output voltage | 70 ... 214 | Vdc | See graph |
| Output voltage max. | 260 | V | Peak voltage at open load |
| Programmable output current | 300 ... 1050 | mA | |
| Output current min dimming | 150 | mA | |
| Output current tolerance | ± 5 | % | |
| Output current ripple LF | ≤ 4 | % | Ripple = peak / average, 70Hz ... 1kHz |
| Output current ripple HF | ≤ 15 | % | Ripple = peak / average, > 1kHz |
| Output power range | 10 ... 150 | W | |

Electrical data controls input


| Specification item | Value | Unit | Condition |
|--------------------|-----------------------------|------|----------------------------------|
| Control method | LineSwitch, Dynadimmer LITE | | |
| Dimming range | 15 ... 100 | % | Output current amplitude dimming |

Logistical data

| Specification item | Value |
|--------------------|--------------------------------------|
| Product name | Xi LP 150W 0.3-1.0A SL 230V S240 sXt |
| Order code | 871869648170700 |
| Logistic code 12NC | 9290 009 62706 |
| EAN3 | 8718696481714 |
| Pieces per box | 10 |

Wiring & Connections

| Specification item | Value | Unit | Condition |
|-----------------------------|-----------|-----------------|---|
| Input wire cross-section | 0.5...2.5 | mm ² | Push-in at 0° angle, solid and stranded wire |
| | 20...12 | AWG | |
| Input wire strip length | 10 ... 11 | mm | |
| Output wire cross-section | 0.2...1.5 | mm ² | Push-in at 45° angle, solid and stranded wire |
| | 24...16 | AWG | |
| Output wire strip length | 8.5...9.5 | mm | |
| Maximum output cable length | 2.5 | m | CISPR 15: between driver and LED module |

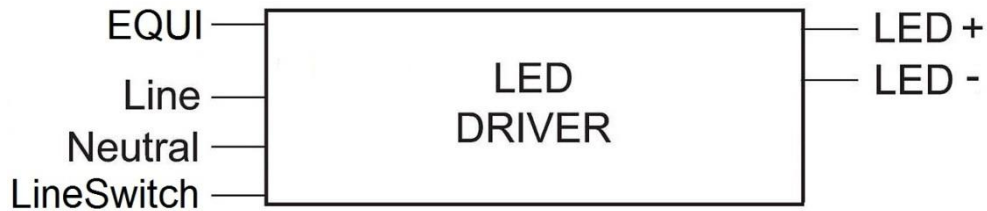


Insulation

| Insulation | Mains | EQUI | LED | LineSwitch |
|------------|--------|--------|--------|------------|
| Mains | N/A | Double | Double | None |
| EQUI | Double | N/A | Basic | Double |
| LED | Double | Basic | N/A | Double |
| LineSwitch | None | Double | Double | N/A |

Dimensions and weight

| Specification item | Value | Unit | Condition |
|---------------------------|-------------|------|--|
| Length (A1) | 240.5 ± 0.5 | mm | |
| Width (B1) | 58.6 ± 0.3 | mm | |
| Height (C1) | 37.8 ± 0.5 | mm | |
| Fixing hole diameter (D1) | 4.5 | mm | Screw: M4. washer: $\phi \leq 10.5\text{mm}$, torque: $\leq 1.5\text{Nm}$ |
| Fixing hole distance (A2) | 226.2 ± 0.5 | mm | |
| Fixing hole distance (B2) | 42.9 ± 0.3 | mm | |
| Weight | 640 | gram | |

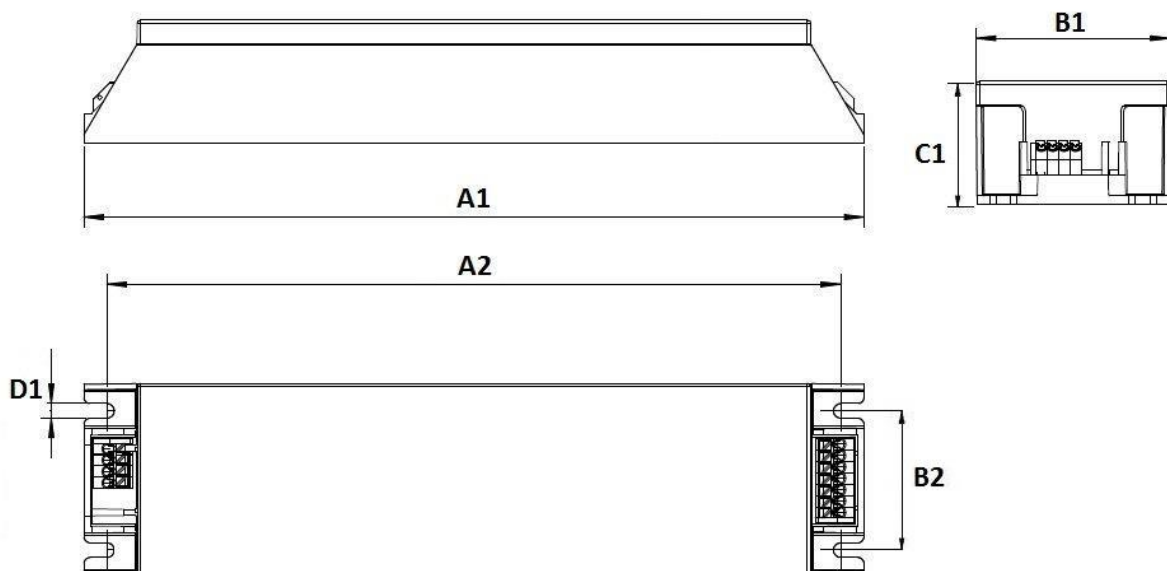

Operational temperatures and humidity

| Specification item | Value | Unit | Condition |
|-----------------------------|-----------|------|---|
| Driver ambient temperature | -40...+55 | °C | At nominal output power. Higher ambient temperature allowed as long as T _{case-max} is not exceeded. |
| T _{case-min} | -30 | °C | Min. steady-state T _{case} |
| T _{case-max} | +90 | °C | Max. steady-state T _{case} |
| T _{case-life} | -30...+80 | °C | For nominal driver lifetime |
| Maximum housing temperature | 130 | °C | In case of failure |
| Relative humidity | 10...90 | % | Non-condensing |
| Ingress Protection | 20 | | Suggested luminaire IP: ≥ IP54 |
| Noise and hum | 24 | dB | Typical |

Storage temperature and humidity

| Specification item | Value | Unit | Condition |
|---------------------|-----------|------|----------------|
| Ambient temperature | -30...+80 | °C | |
| Relative humidity | 10...90 | % | Non-condensing |

Lifetime

| Specification item | Value | Unit | Condition |
|-----------------------|---------|-------|--|
| Rated driver lifetime | 100,000 | hours | T _{case} ≤ T _{case-life} Maximum failures = 10% |

Programmable features

| Specification item | Value | Remark | Default setting |
|------------------------------------|-----------|---|--|
| Adjustable Output Current (AOC) | SimpleSet | See Design-in guide | 700mA |
| LineSwitch | Yes | V _{low} : < 160Vac V _{high} : 170 ... 264Vac | Enabled, 100% light output at V _{low} |
| Constant Lumen Over Lifetime (CLO) | Yes | CLO LITE | Disabled |
| Diagnostics | Yes | Basic options | Enabled |
| Integrated Dynadimmer | Yes | Dynadimmer LITE | Disabled |

Features


| Specification item | Value | Remark | Condition |
|---|----------|--------|---------------------------------|
| Open load protection | Yes | | Automatic recovering |
| Short circuit protection | Yes | | Automatic recovering |
| Over power protection | Yes | | Automatic recovering |
| Overheating protection | Yes | | Automatic recovering. See graph |
| Hot wiring | No | | |
| Suitable for luminaire insulation class | I and II | | Per IEC60598 |

Certificates and standards

| Specification item | Value |
|--------------------|-------------------------------------|
| Approval marks | CE / ENEC / CB / CCC Pending: VDE-S |

Inrush current

| Specification item | Value | Unit | Condition |
|----------------------------|--------|---------|---|
| Inrush current I_{peak} | 53 | A | Input voltage 230Vac |
| Inrush current T_{width} | 300 | μs | Input voltage 230Vac, measured at 50% I_{peak} |
| Typical number of drivers | Max. 8 | pcs | MCB 16A B type, mains impedance $200m\Omega + 400\mu H$ |

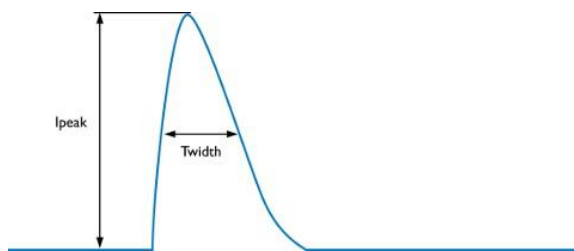

| MCB | Rating | Relative number of LED drivers |
|-----|--------|--------------------------------|
| B | 10A | 63% |
| B | 13A | 81% |
| B | 16A | 100% |
| B | 20A | 125% |
| B | 25A | 156% |
| C | 10A | 104% |
| C | 13A | 135% |
| C | 16A | 170% |
| C | 20A | 208% |
| C | 25A | 260% |

Driver touch current


| Specification item | Value | Unit | Condition |
|-----------------------|-------------|---------|---|
| Typical touch current | 0.34 / 0.41 | mA peak | Acc. IEC61347-1 at 230Vac 50/60Hz LED module contribution not included |

Surge immunity


| Specification item | Value | Unit | Condition |
|-------------------------------------|-------|---------|--|
| Mains surge immunity (diff. mode) | 6 / 3 | kV / kA | L-N acc. IEC61000-4-5. 2 Ohm, 1.2/50 μs , 8/20 μs |
| Mains surge immunity (comm. mode) | 8 | kV | L/N - GND acc. IEC61000-4-5. 12 Ohm, 1.2/50 μs , 8/20 μs |
| Control surge immunity (diff. mode) | 6 | kV | Ls-L, Ls-N acc. IEC61000-4-5. 2 Ohm 1.2/50 μs , 8/20 μs |
| Control surge immunity (comm. mode) | 8 | kV | Ls - GND acc. IEC61000-4-5. 12 Ohm 1.2/50 μs , 8/20 μs |

Graphs


Operating window

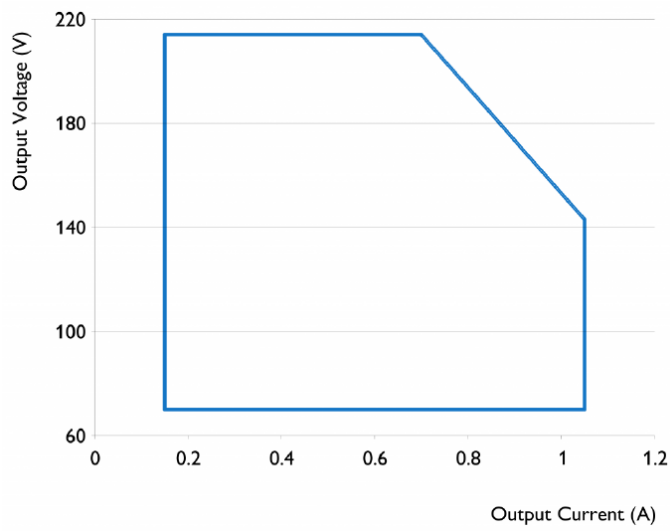


Power factor versus output power

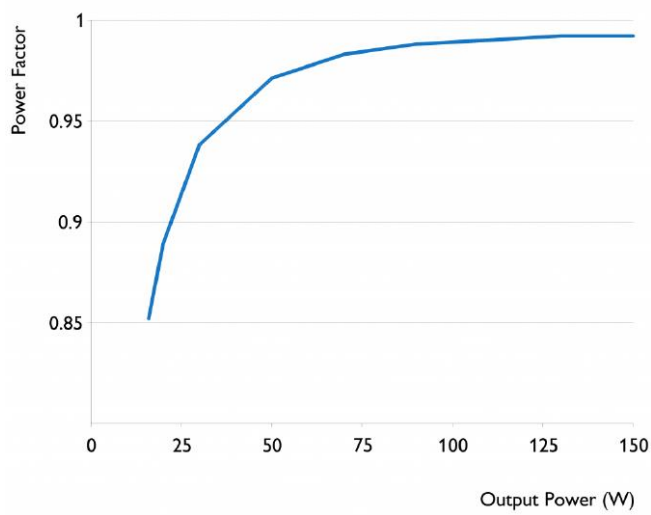


Efficiency versus output power

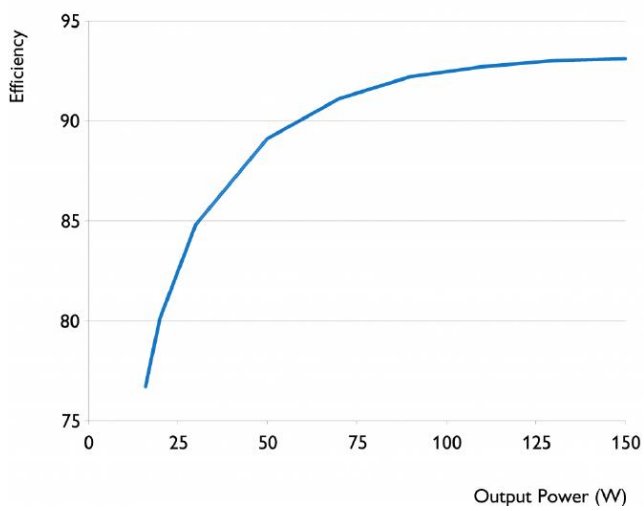

THD versus output power

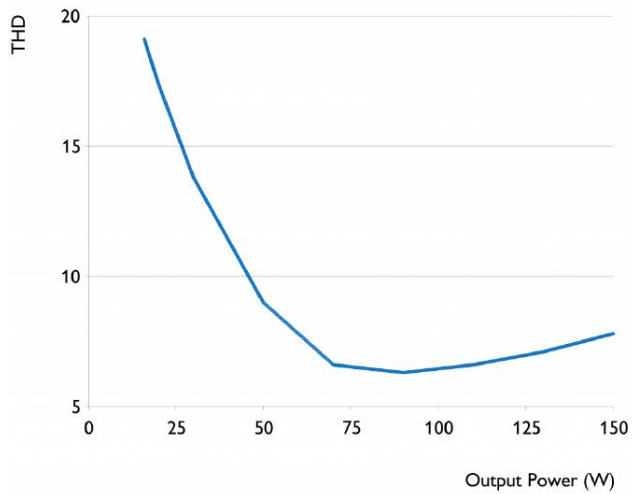

Driver output current versus Tcase

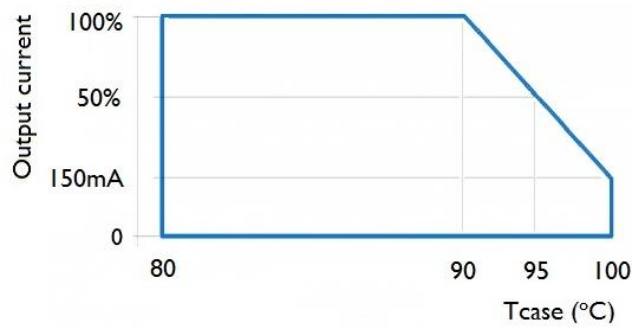

©2015 Koninklijke Philips Electronics N.V.

All rights reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use. Publication thereof does not convey nor imply any license under patent- or other industrial or intellectual property rights. Data subject to change.

Date of release: November 2015

www.philips.com/xitanium